



# **BWTS SD CARD FORMAT MANUAL**



---




1



OPEN CONTROL  
PANEL

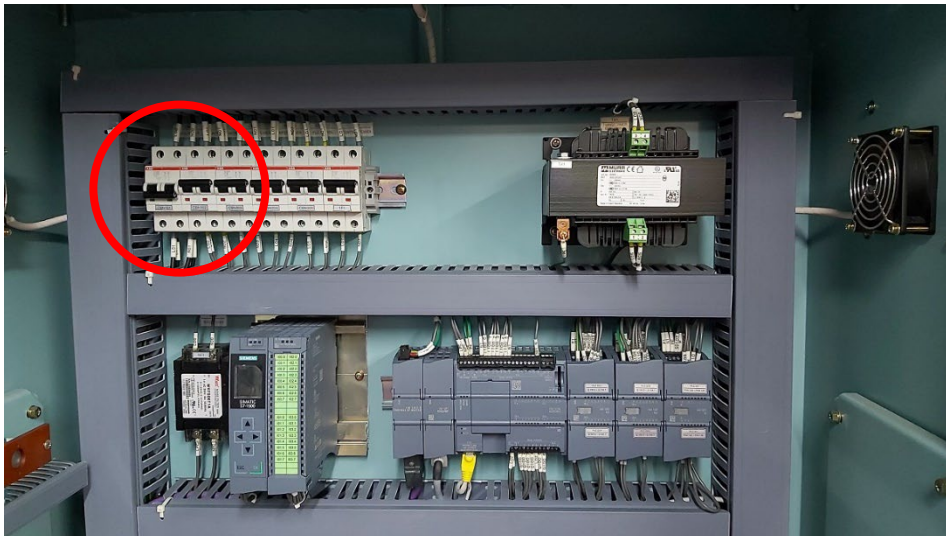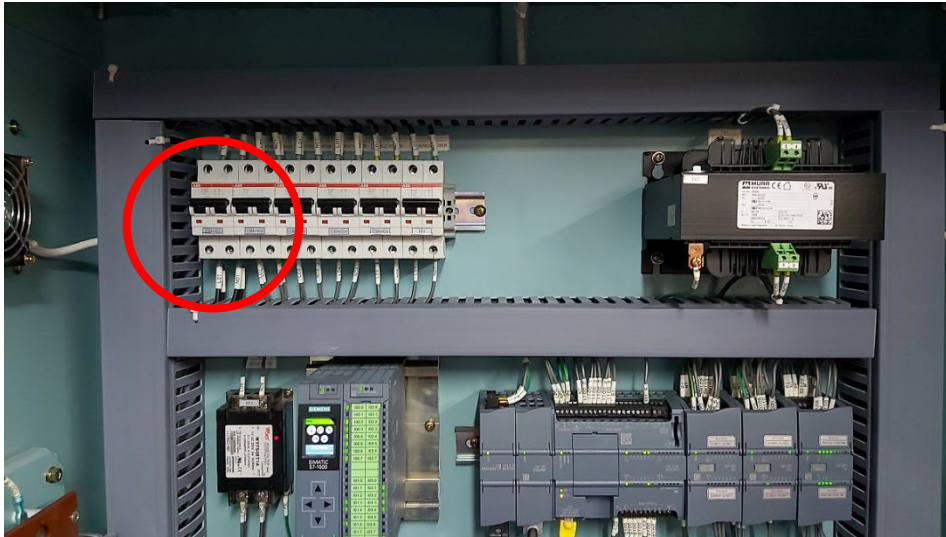


POWER OFF MAIN  
CONTROL PANEL

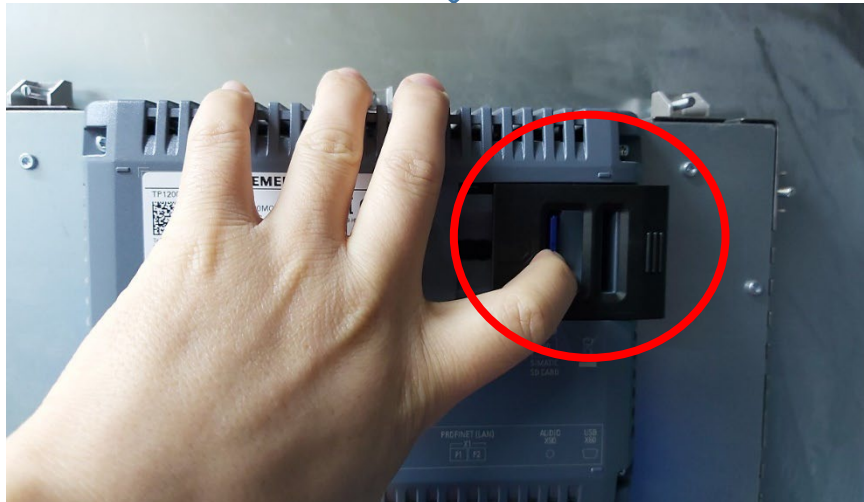


CHECK HMI POWER  
OFF

PUSH SD CARD  
AND PULL OUT IT AT  
HMI BACK SIDE.

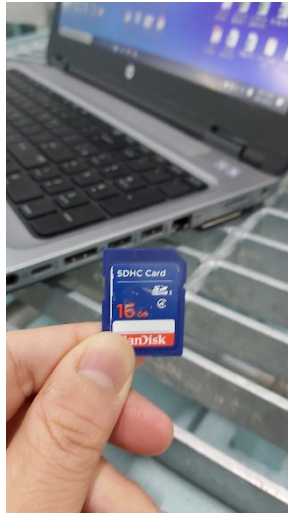


# INSERT SD CARD TO COMPUTER

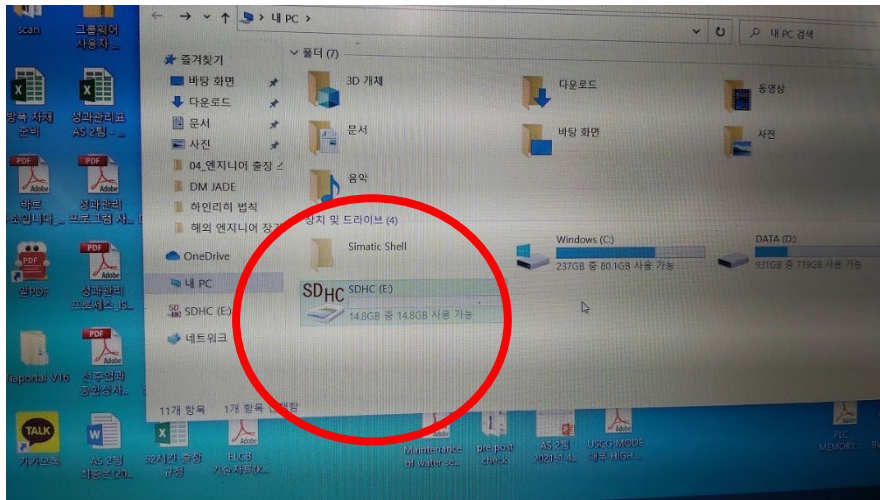


# CHECK TO RECOGNIZE SD CARD



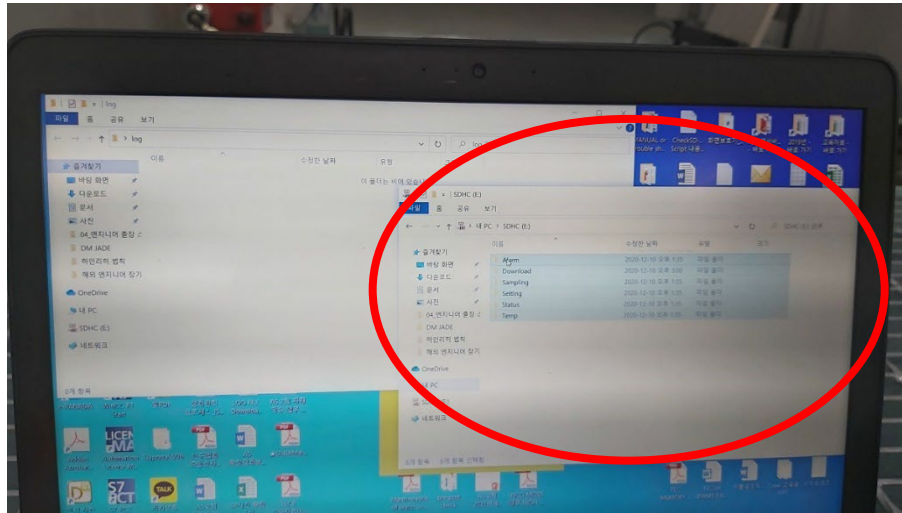


CHECK FILE INSIDE  
SD CARD

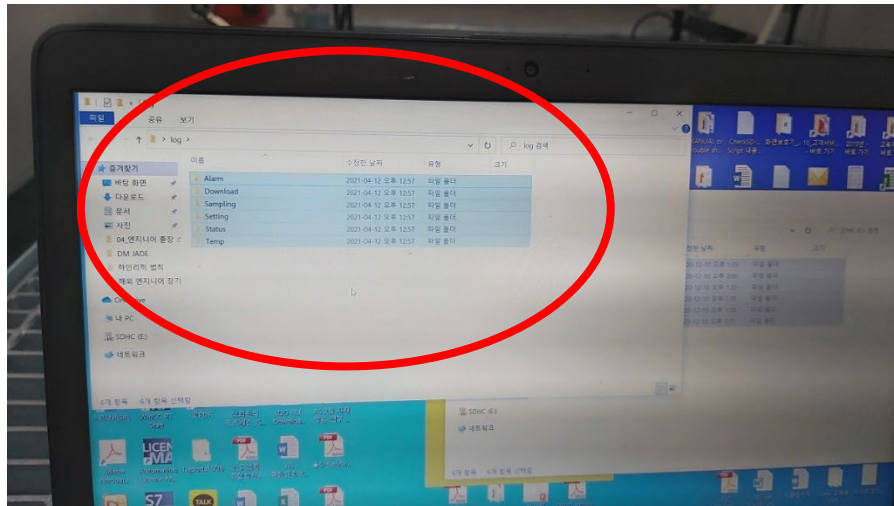


COPY FILE TO  
COMPUTER

IF NOT COPY TO COMPUTER ,  
SD CARD HAS PROBLEM SO  
IGNORE THIS PAGE AND GO TO  
NEXT PAGE.

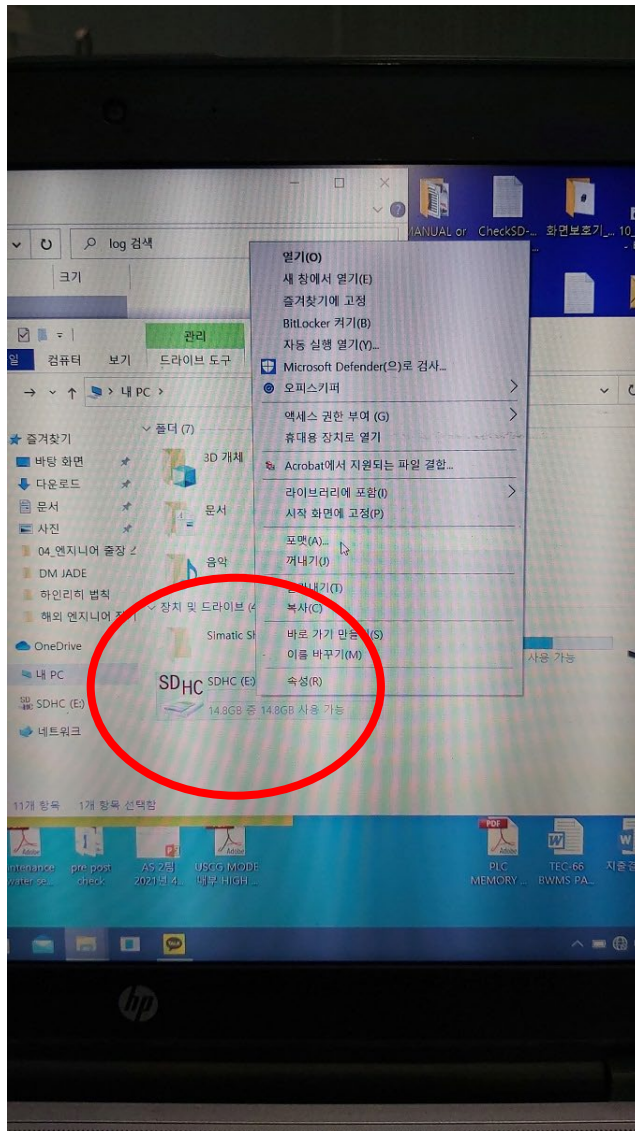

MY COMPUTER  
->MOUSE POSITION  
SD CARD  
->RIGHT BUTTON  
->FORMAT

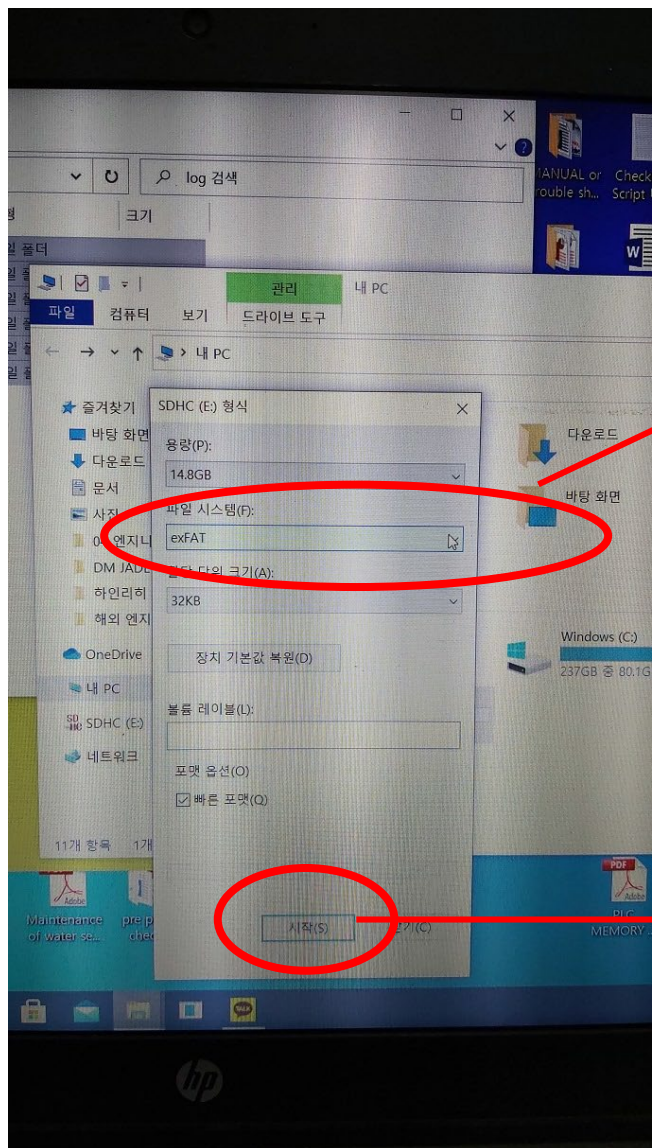


FORMAT TYPE SETTING  
exFAT TYPE




PUSH START




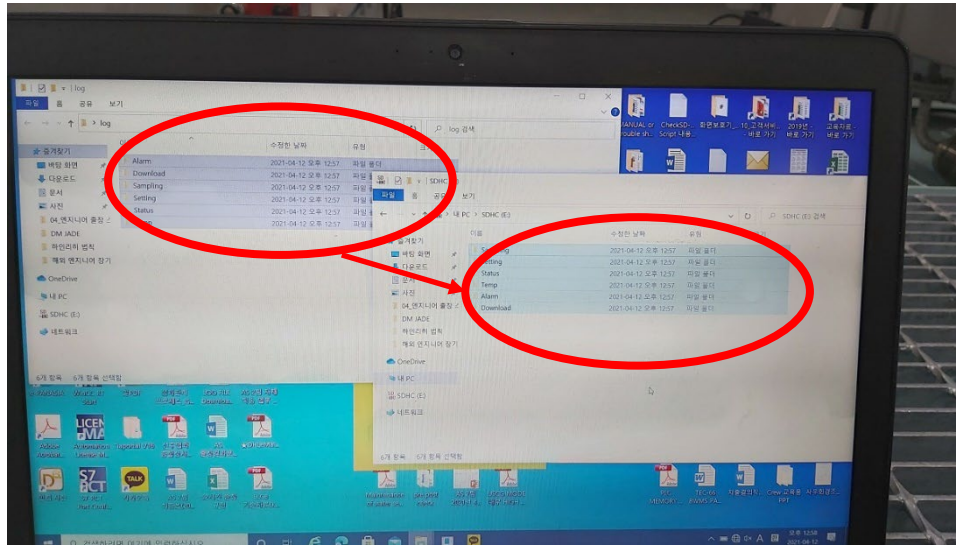


COPY FROM BACK UP FILE  
IN COMPUTER TO SD CARD

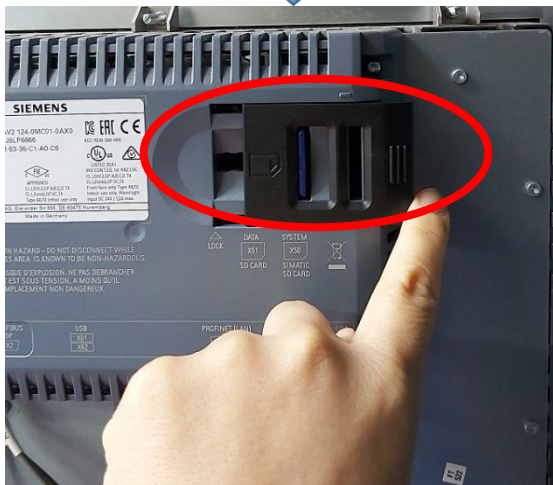


INSERT SD CARD AT HMI

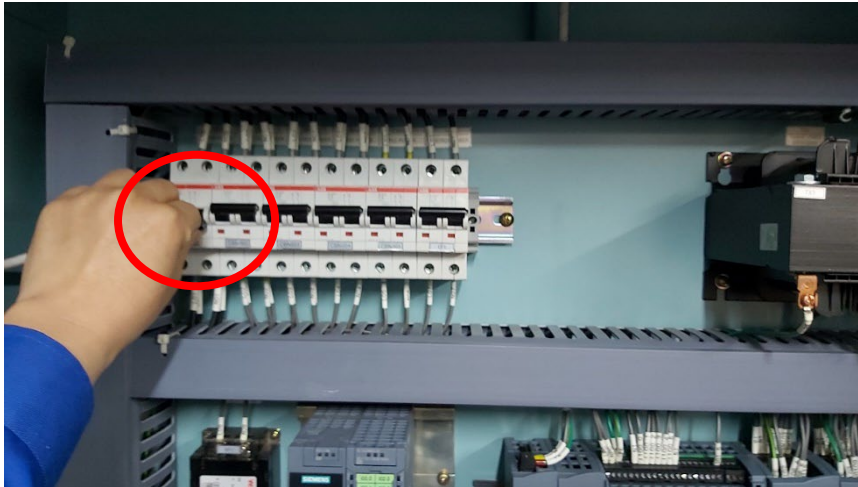

POWER ON CONTROL  
PANEL

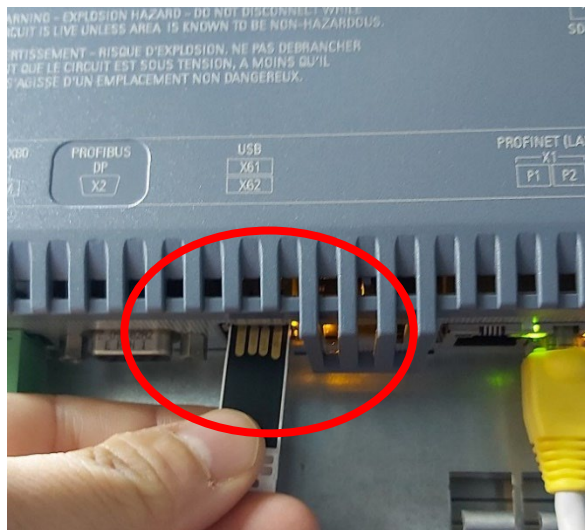

INSERT USB AT HMI BACK  
SIDE

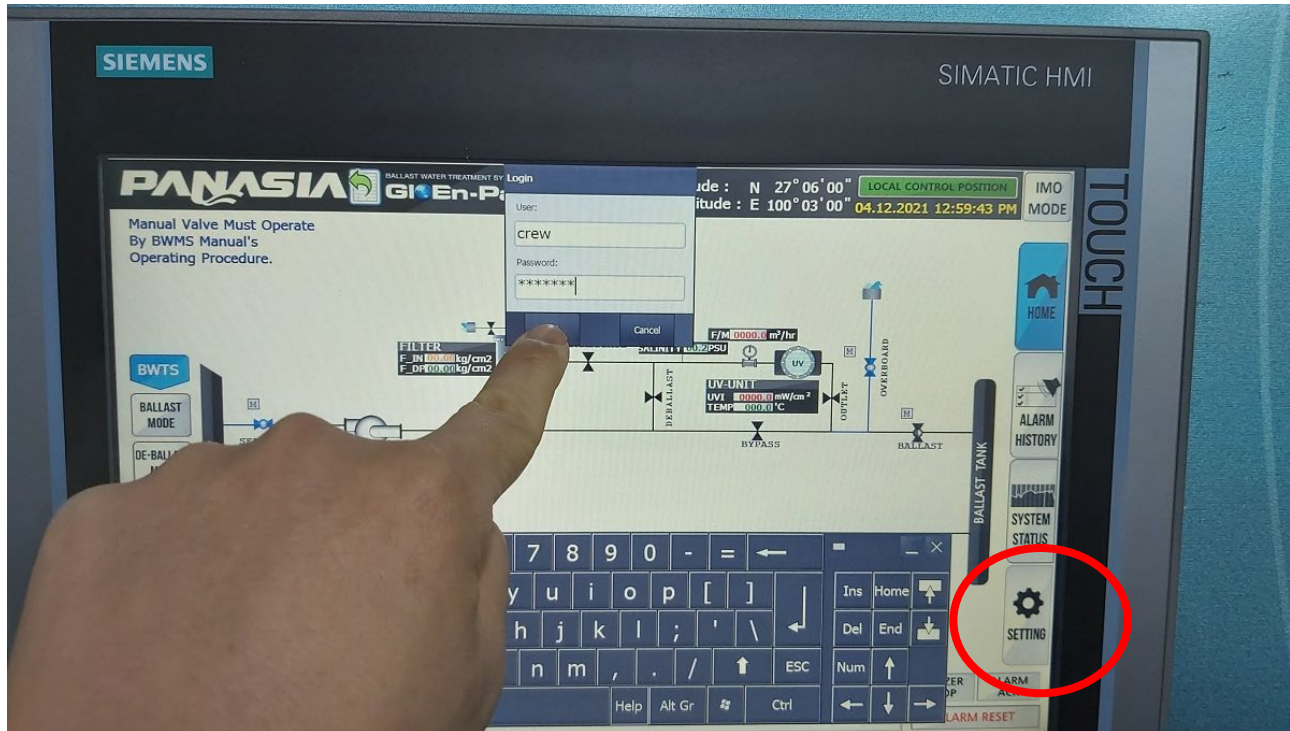

LOGGING TEST  
PUSH SETTING  
ID : CREW  
PASSWORD : 1111111  
PUSH SETTING



FOR EXAMPLE  
2021.04.01-2021.04.12  
LOGGING TEST

PUSH 20210401 ENTER  
PUSH 20210412 ENTER

PUSH UPDATE  
BOTTON

WAIT UNTIL SAVED  
ALL LOG

**PANASIA** GLOBE-En-Patrol II v3.30.1

Latitude : N 27° 06' 00" Longitude : E 100° 03' 00" 04.12.2021 1:00:25 PM

**FILTER**  
DP MODE OPERATING SET VALUE 0.10 [kg/cm2]  
CYCLE TIME OVER ALARM SET 053 [SEC]  
INLET PRESS. LOW ALARM SET 00.50 [kg/cm2]

**UV-UNIT**  
TIMER MODE CLEANING INTERVAL 15 [MIN]  
CYCLE TIME OVER ALARM SET 070 [SEC]  
CHAMBER TEMP. TRIP 60.0 [°C]

**VALVE**  
DRAIN START DELAY TIME SET 900 [MIN]


**FLUSHING**  
FILTER DP

**CLEANING**  
MANUAL UV UNIT INTENSITY TIMER MANUAL


**Log Update**  
DATE(YYYYMMDD) FROM: 20210401 TO: 20210412

Time	Date	Text
1:00:23 PM	04.12.2021	Saved all logs
12:00:23 PM	04.12.2021	Saved status log : Setting_202104.csv
1:00:23 PM	04.12.2021	SettingData re-organization completed
1:00:23 PM	04.12.2021	SettingData re-organization started
1:00:23 PM	04.12.2021	Saved status log : Status_202104.csv



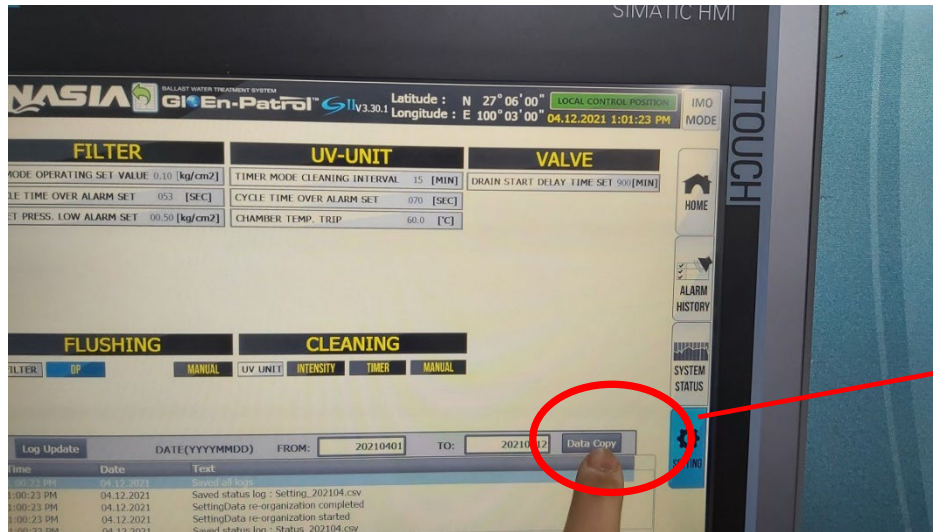


PUSH DATA COPY  
BOTTON

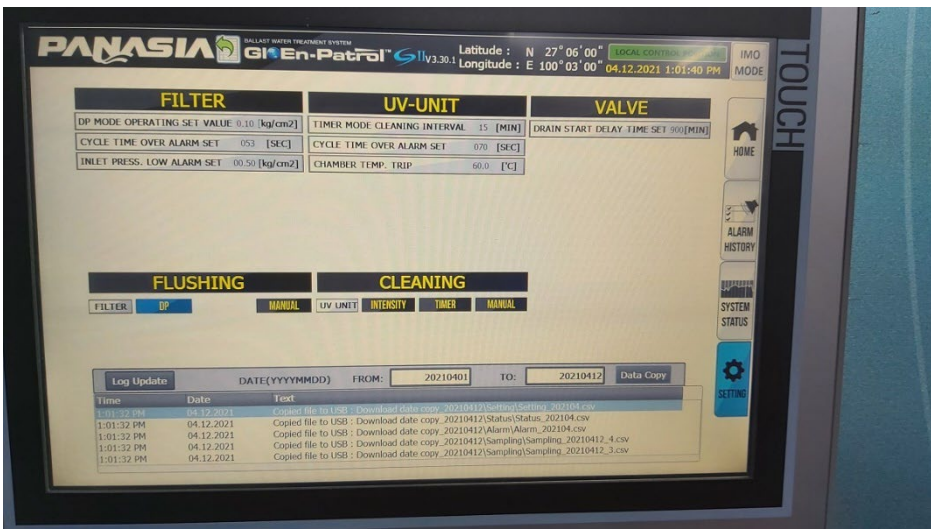


WAIT ALL FILE COPY TO  
USB



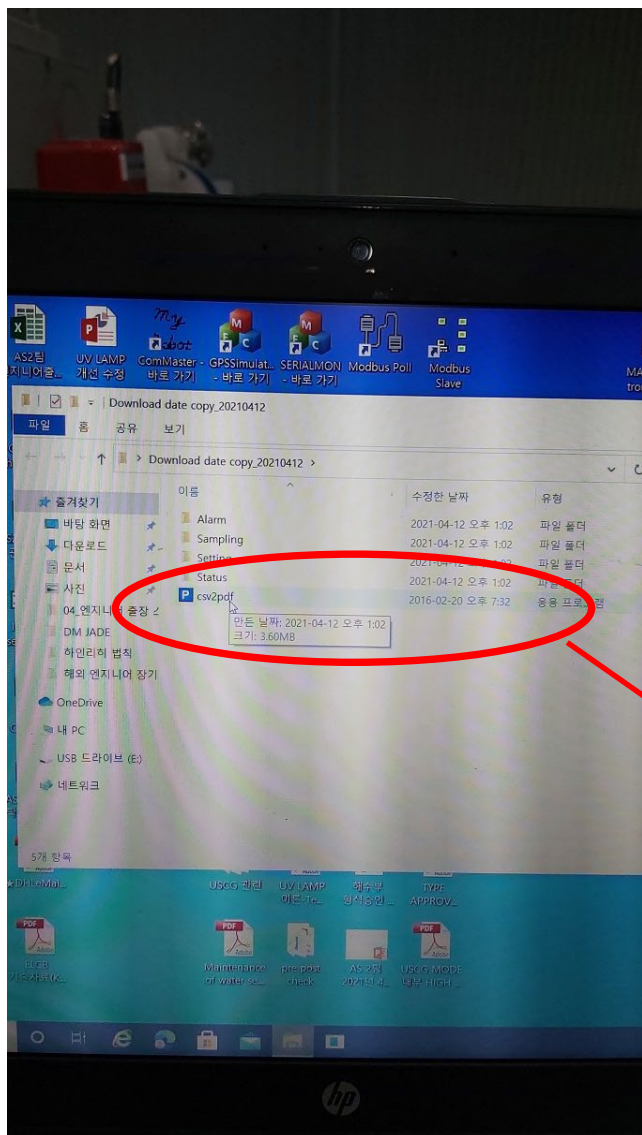


CHECK USB LOGGING  
DATE FOLDER.

DOUBLE CLICK CSV2  
FILE

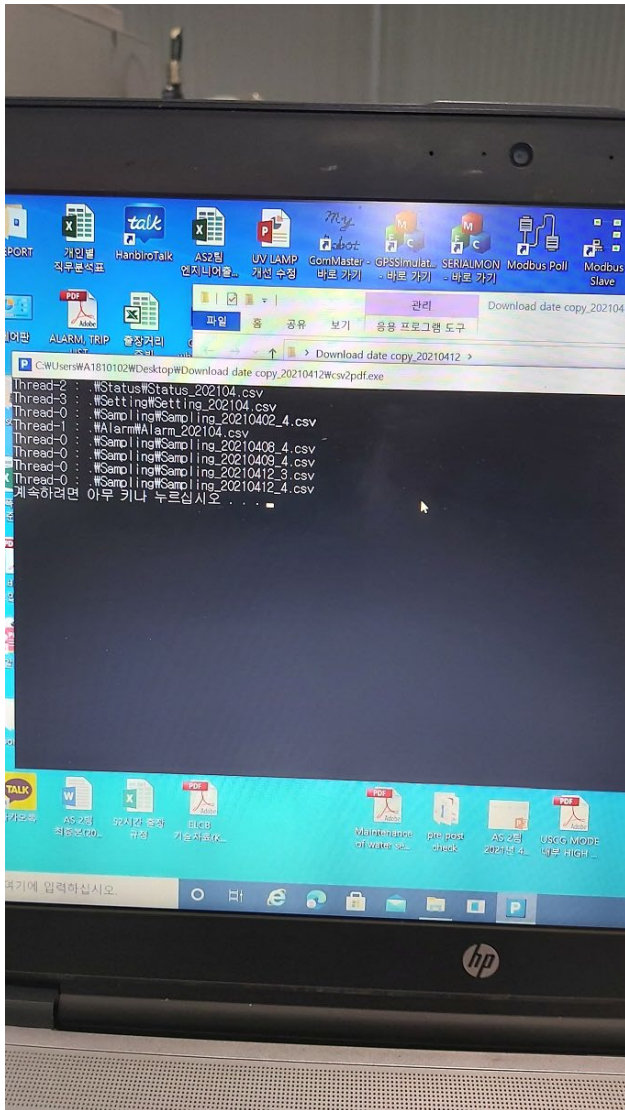

START TO CONVERT  
PDF FILE AUTOMATICALLY

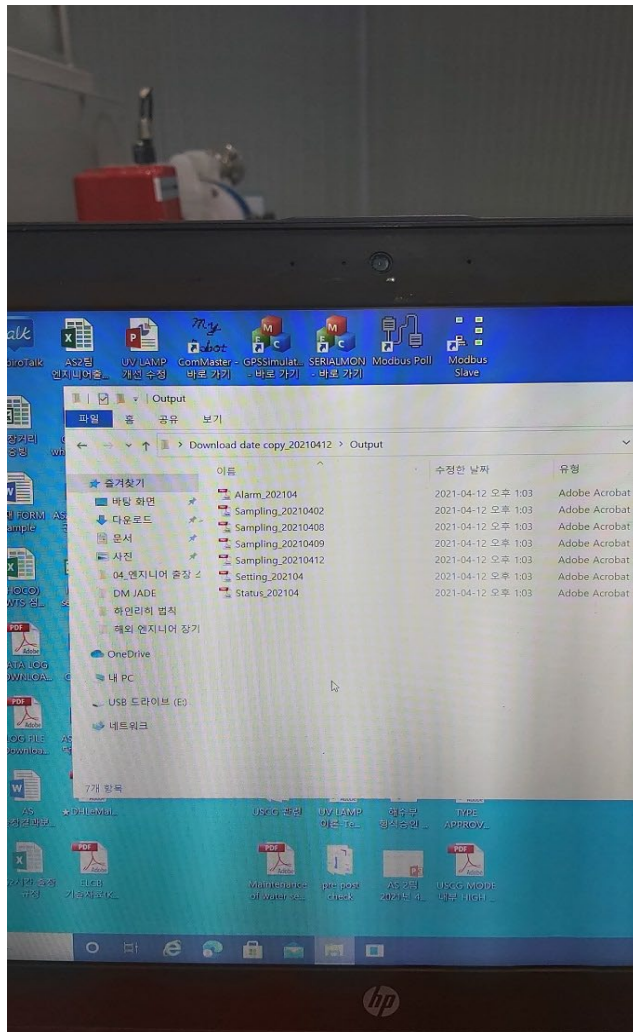

YOU CAN SEE OUTPUT FOLDER AND CHECK LOG PDF FILE INSIDE OUTPUT FOLDER.